

## Data Sheet

LT-KD-DS-1/26-6

### OVERVIEW

Kwik-Drain allows the user quickly install a drain connector in the most beneficial location on the system without draining down.


### INSTALLATION

Use method statement WIUPD 019 or WIUPD 039 (2" outlet) which provides step by step instructions for installing the Kwik-Drain and is available by contacting Project Fire Products Ltd or can be downloaded from [www.projectfireproducts.co.uk](http://www.projectfireproducts.co.uk)



### DIMENSIONS & ORDERING INFORMATION

Part code	Size (in")	a (mm)	Max Pressure (bar)
LT-KD50	2" x 1"	145	12
LT-KD65	2½" x 1"	149	12
LT-KD80	3" x 1"	151	12
LT-KD80-50	3" x 2"	200	12
LT-KDI100	4" x 1"	166	12
LT-KDI100-50	4" x 2"	210	12
LT-KDI150	6" x 1"	197	12
LT-KDI150-50	6" x 2"	240	12

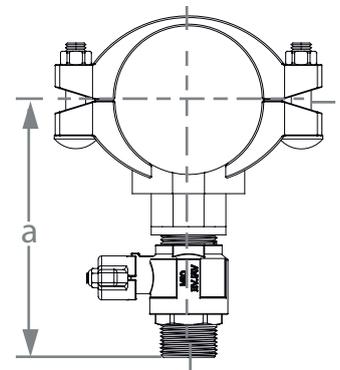

### TECHNICAL DATA

Model	Drill											Bolts	
	Size mm	Size "	Weight	Shell Cutter	Pilot Drill	Ø Hole Size (mm)	Drill (S/L)	Ext Shaft	Ø Magnet	Arbour	Adaptor	Size	Torque
Kwik-Drain													
LT-KD50	50 x 25	2 x 1	2.1	7/8"	1/4 - 3/8"	21.7	S/L	150	12	-	1"	M10	41
LT-KD65	65 x 25	2½ x 1	2.4	7/8"	1/4 - 3/8"	21.7	S/L	150	12	-	1"	M12	68
LT-KD80	80 x 25	3 x 1	2.5	7/8"	1/4 - 3/8"	21.7	S/L	150	12	-	1"	M12	68
LT-KD80-50	80 x 50	3 x 2	4.7	1 7/8"	3/8"	47.5	L	325	35	●	2"	M12	68
LT-KD100	100 x 25	4 x 1	2.7	7/8"	1/4 - 3/8"	21.7	S/L	150	12	-	1"	M12	68
LT-KD100-50	100 x 50	4 x 2	5.0	1 7/8"	3/8"	47.5	L	325	35	●	2"	M12	68
LT-KD150	150 x 25	6 x 1	5.1	7/8"	1/4 - 3/8"	21.7	S/L	150	12	-	1"	M16	136
LT-KD150-50	150 x 50	6 x 2	7.3	1 7/8"	3/8"	47.5	L	325	35	●	2"	M16	136

### TRAINING

Only suitably trained and qualified personnel can use the Livetap® drilling system and its associated product range. All trained and qualified personnel are certificated and carry photo-identity. This certification should be inspected and verified prior to the commencement of any work. Full details of locally certified installers are available from Project Fire or our international distributor network. All certified installers must use the comprehensive range of specialist tools which are included in the Livetap® system tool kit. Only approved Livetap® products should be used. Drills and fittings are available from the manufacturer or for hire from approved distributors.

Spare parts and consumable kits are available from the manufacturer or for hire from approved distributors (contact Project Fire Products for more information). To purchase consumable parts directly online please visit: [www.projectfireproducts.co.uk](http://www.projectfireproducts.co.uk)